


## Metal Film, Cylindrical Resistors

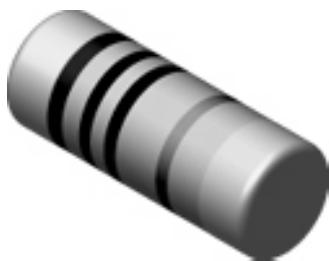

### FEATURES

- Stable metal film on high quality ceramic
- Low TC and tight tolerances
- Excellent stability in different environmental conditions
- Force fitted steel caps, tin plated on nickel barrier
- Reliable solderable terminations to facilitate surface mounting

### STANDARD ELECTRICAL SPECIFICATIONS

MODEL	POWER RATING $P_{70^\circ\text{C}}^1)$ W	LIMITING ELEMENT VOLTAGE MAX <sup>2)</sup> V $\geq$	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE $\Omega$	E-SERIES
SMM0204-MS1	0.25	200	15	0.1 0.25 0.5	43R – 221K 22R – 221K 10R – 221K	24 – 192 24 – 192 24 – 192
SMM0204-MS1	0.25	200	25	0.1 0.25 0.5	43R – 511K 22R – 511K 10R – 1M0	24 – 192 24 – 192 24 – 192
SMM0204-MS1	0.25	200	50	0.5 1	10R – 1M0 R82 – 10M	24 – 192 24 – 96
SMM0204-MS1	0.25	200	100	5	R22 – 10M	24
SMM0204HF MS1 <sup>4)</sup>	0.25	200	50	1	10R – 1K0 <sup>3)</sup>	96
Zero-Ohm-Resistor: OMM0204-MS1 $R_{max} = 10\text{m}\Omega$ $I_{max} = 2\text{A}$						

<sup>1)</sup> Power rating depends on the maximum temperature at the solder point, the component placement density and the substrate material

<sup>2)</sup> Rated voltage:  $\sqrt{PxR}$


<sup>3)</sup> Values below 10  $\Omega$  on request

<sup>4)</sup> Low inductive trim for high frequency application

- Further values and tolerances on request
- Coating:  
Light green for TC= 100ppm/K, 50ppm/K and zero ohm resistor  
Pink TC= 25ppm/K  
Violet TC= 15ppm/K  
Beige HF version
- Marking : see appropriate catalog or web page
- Zero ohm resistor has a black band only

### ORDERING INFORMATION

SMM0204-MS1	50	562R	1%	B0
MODEL	TC ppm / K	RESISTANCE VALUE $\Omega$	TOLERANCE $\pm$ %	PACKAGING B0-Blistertape 10000 pcs

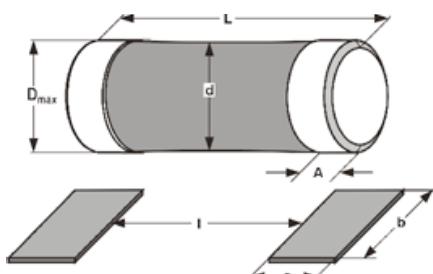**DIMENSIONS**


MODEL	DIMENSIONS [in millimeters]				
	D <sub>max</sub>	d *	L	A <sub>max</sub>	A <sub>min</sub>
SMM0204-MS1	1.4	D -0.15	3.6 - 0.15	0.85	0.5



\**d* measured in the middle of the resistor

MODEL	SOLDER PAD DIMENSIONS [in millimeters]					
	REFLOW SOLDERING			WAVE SOLDERING		
	a	b	I	a	b	I
SMM0204-MS1	1.0	1.6	2.2	1.2	1.6	2.2

**TECHNICAL SPECIFICATIONS**

PARAMETER	UNIT	SMM0204 – MS1
Rated Dissipation at 70°C	W	0.25
Limiting Element Voltage <sup>2)</sup>	V $\cong$	200
Insulation Voltage (1 min)	V <sub>dc/ac peak</sub>	> 300
Thermal Resistance <sup>1)</sup>	K/W	$\leq 220$
Insulation Resistance	$\Omega$	$\geq 10^{10}$
Category Temperature Range	°C	- 55 / + 125 (+ 155)
Failure Rate	10 <sup>-9</sup> /h	< 1
Weight / 1000pcs	g	18









<sup>1)</sup> Based on measurements on test board acc. to EN 140000
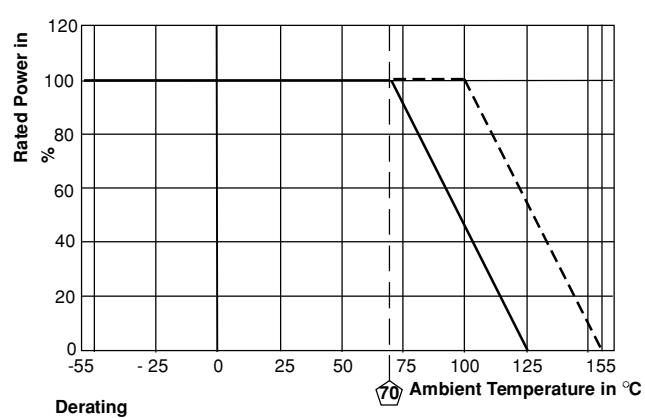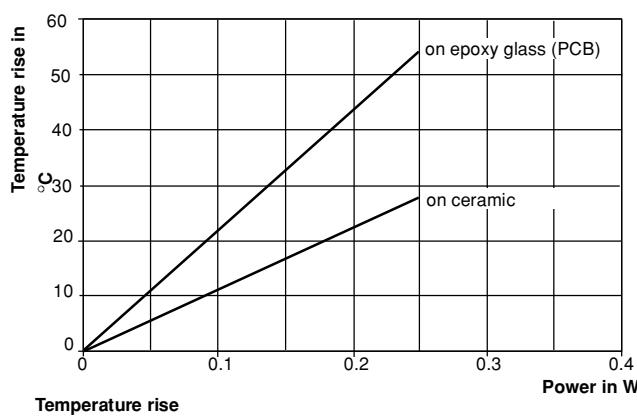
<sup>2)</sup> Rated voltage:  $\sqrt{PxR}$ 


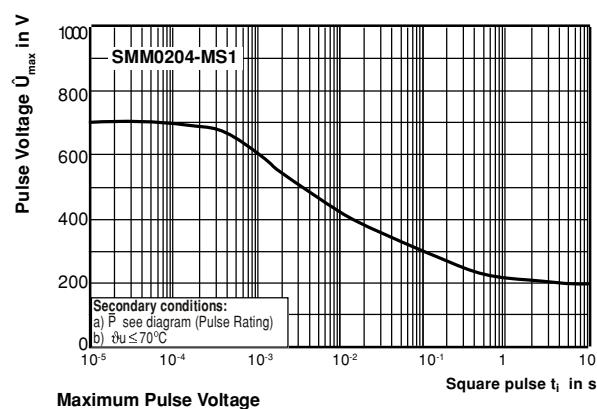
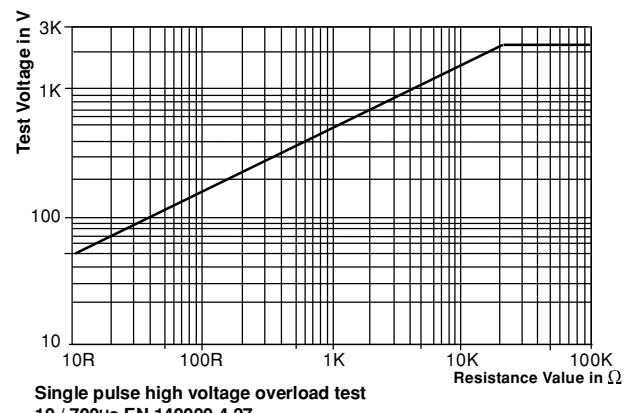
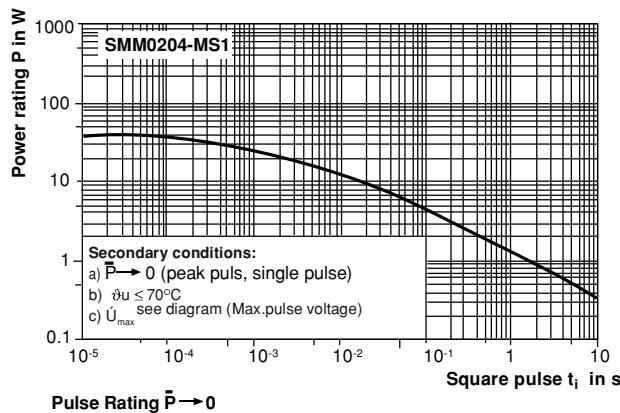
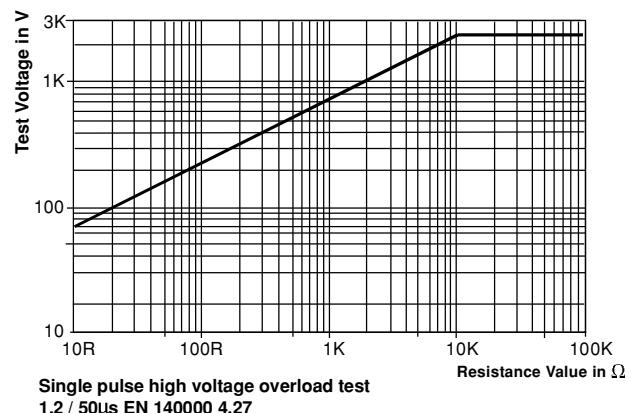
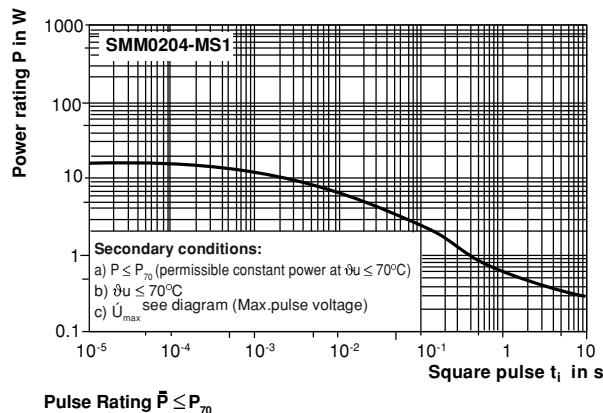
# SMM0204 / MS1

Vishay Draloric

Metal Film Cylindrical Resistors

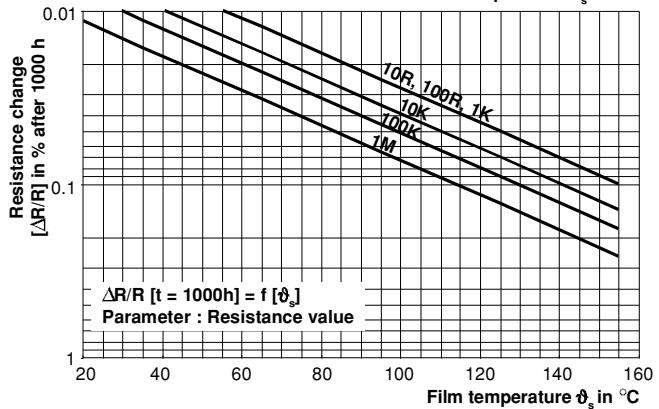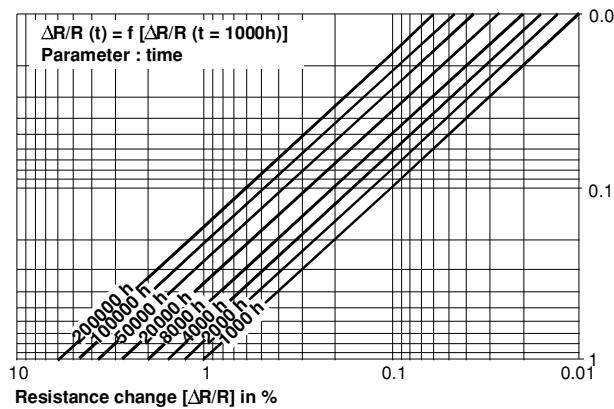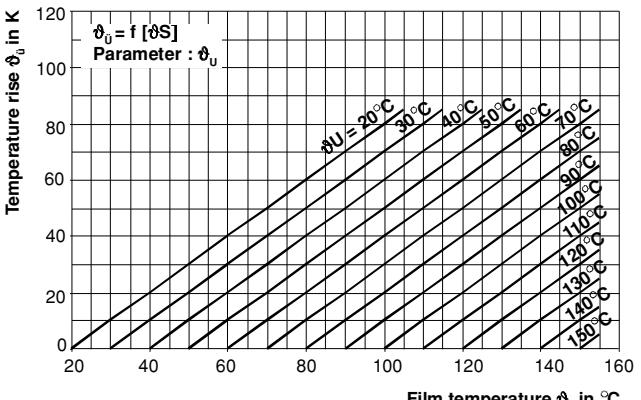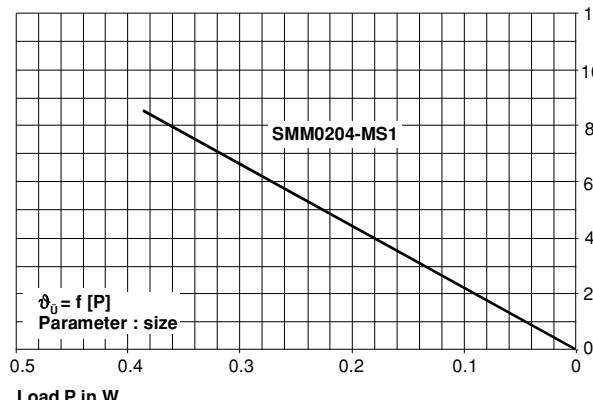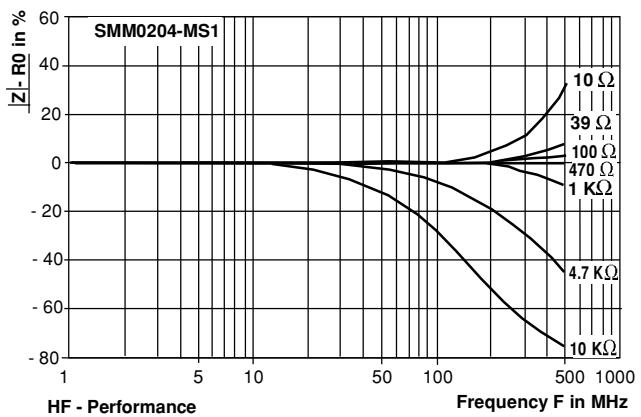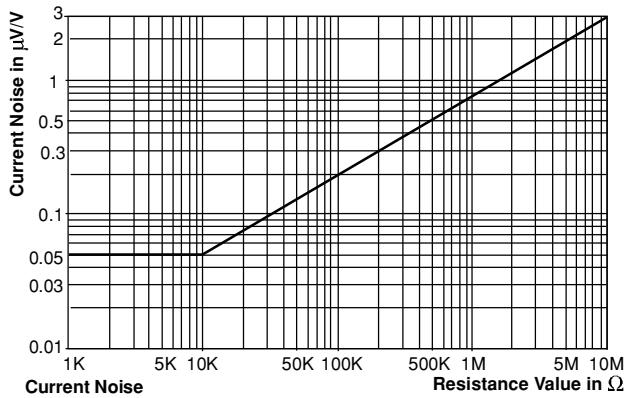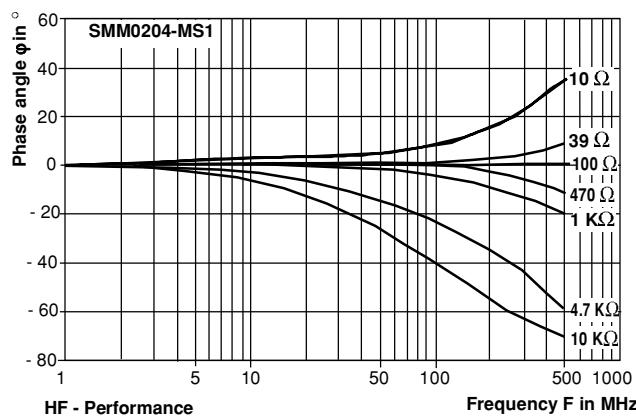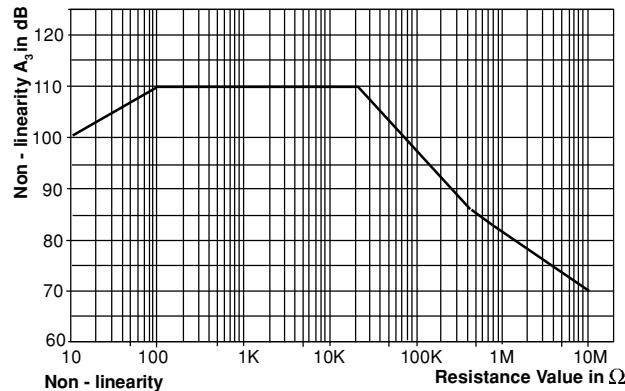


Stability Nomogram typical values (for handling see general explanations)



# SMM0204 / MS1

Vishay Draloric

Metal Film Cylindrical Resistors

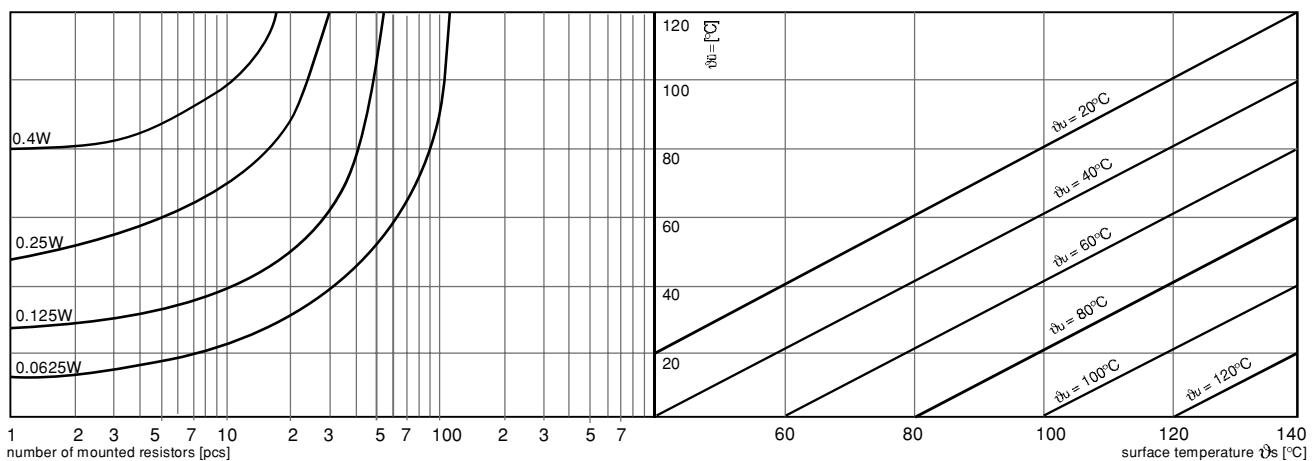

**Power rating as a function of packaging density (guideline)**

Testboard FR4 (50 x 50 x 1.6)mm

PACKAGING								
MODEL	REEL				BULK			
	TAPE WIDTH	DIAMETER	PIECES / REEL	CODE	BULK FEEDING MAGAZINE		LOOSE IN PLASTIC CONTAINER	
					PIECES	CODE	PIECES	CODE
SMM0204-MS1 SMM0204HF-MS1 OMM0204-MS1	8mm Blistertape	180mm 180mm 180mm 330mm	1000 2500 3000 10000	B1* BE B3 B0	3000	M3	1000 5000	L1 L5

\*For  $< = \text{TC}25$  and Tol.  $< = 0.5\%$  only



<b>PERFORMANCE</b>		
<b>TEST</b>	<b>CONDITIONS OF TEST</b>	<b>REQUIREMENTS <sup>1)</sup></b>
Endurance Test at 70°C IEC 60115-1 4.25.1	1000 hours at 70°C 1.5 hours "ON" 0.5 hours "OFF"	≤ ± 0.25 %
Endurance at UCT IEC 60115-1 4.25.3	1000 hours at 125°C without load	≤ ± 0.25 %
Overload Test IEC 60115-1 4.13	Short time overload for 2 seconds 2.5 x rated voltage or ≤ 2 x limiting element voltage	≤ ± 0.05 %
Thermal Shock IEC 60115-1 4.19 IEC 60068-2-14	Rapid change between upper and lower category temperature	≤ ± 0.05 %
Damp Heat Steady State IEC 60115-1 4.24 IEC 60068-2-3	56 days at 40°C and 93% relative humidity	≤ ± 0.25 %
Resistance to Soldering Heat IEC 60115-1 4.18 IEC 60068-2-20	10 seconds at 260°C solder bath temperature	≤ ± 0.05 %

<sup>1)</sup> for a resistance range from 10Ω to 332KΩ, Limits for change of resistance at test acc. to CECC 40401-803

<b>APPLICABLE SPECIFICATIONS</b>
<ul style="list-style-type: none"><li>CECC40000 / 40400 / 40401-803</li><li>EN140400 / IEC 60115 – 1</li></ul>