

# SURFACE MOUNT EMI FILTERS CHIP FERRITE BEADS

**Murata**  
Innovator in Electronics

## BLM□□B Series



The BLM□□B Series ferrite beads have been developed to pass signal frequencies from 10MHz to 100MHz while exhibiting high impedance characteristics to reduce EMI noise above these specific frequencies.


### FEATURES

- Designed to reduce noise above operating frequencies from 10 to 100MHz
- High impedance characteristics
- Small size
- Suitable for flow and reflow soldering

### APPLICATIONS

- Computers and peripheral equipment
- Consumer products
- High speed circuits
- Suitable for circuits with unstable ground

### PART NUMBERING SYSTEM

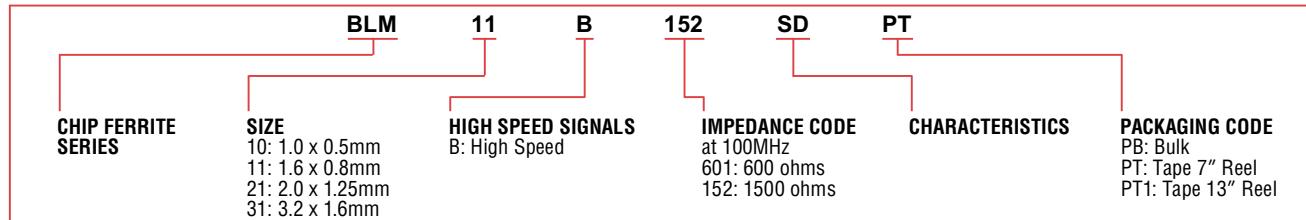

### SPECIFICATIONS

Dimensions: mm	Part Number	Impedance (Ohms) Typ. at 100MHz	Rated Current (mA)	DCR (Ohms max.)	Operating Temperature Range
0402 	★BLM10B750SB	75	100	0.8	-55 ~ +125°C
	★BLM10B121SB	120	50	1.1	
	★BLM10B221SB	220		1.4	
	★BLM10B421SD	420		1.3	
	★BLM10B601SD	600		1.5	
	★BLM10B102SD	1000		1.4	
0603 	★BLM11B050SB	5	700	0.1	-55 ~ +125°C
	★BLM11B050SA	5	500	0.20	
	★BLM11B100SB	10		0.15	
	★BLM11B100SA	10		0.25	
	★BLM11B220SB	22		0.25	
	★BLM11B220SA	22		0.35	
	★BLM11B470SB	47		0.3	
	★BLM11B470SA	47		0.55	
	★BLM11B600SB	60		0.35	
	★BLM11B750S	75	200	0.35	
	★BLM11B750SA	75	300	0.70	
	★BLM11B121SB	120	200	0.5	
	★BLM11B121SA	120		0.90	
	★BLM11B121SD	120		0.4	
	★BLM11B141S	140		0.55	
	★BLM11B151SB	150		0.55	
	★BLM11B151SD	150		0.4	
	★BLM11B221SB	220		0.65	
	★BLM11B221SD	220		0.45	
	★BLM11B331SB	330		0.75	
	★BLM11B331SD	330		0.5	
	★BLM11B421S	420		0.55	
	★BLM11B471SB	470	50	1.0	
	★BLM11B471SD	470	200	0.55	
	★BLM11B601S	600	0.65		





\*Available as standard through authorized Murata Electronics Distributors.

# SURFACE MOUNT EMI FILTERS CHIP FERRITE BEADS

**Murata**  
Innovator in Electronics


BLM□□B Series

## SPECIFICATIONS

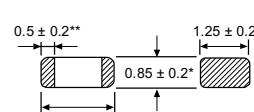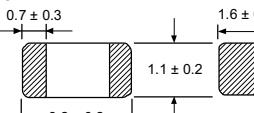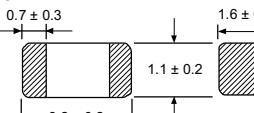Dimensions: mm	Part Number	Impedance (Ohms) Typ. @ 100MHz	Rated Current (mA)	DCR (Ohms max.)	Operating Temperature Range
0603 	★BLM11B102S	1000	100	0.85	50
	★BLM11B152SD	1500		1.2	
	★BLM11B182S	1800		1.5	
	★BLM11B222SD	2200		1.5	
	★BLM11B252SD	2500		1.5	
0805  *1.25 ± 0.3 on BLM21B222S/272S **0.3 ± 0.2 on BLM21B272S	★BLM21B050S	5	500	0.07	-55 ~ +125°C
	★BLM21B600SB	60		0.20	
	★BLM21B750S	75		0.25	
	★BLM21B121SB	120		0.25	
	★BLM21B121SD	120		0.25	
	★BLM21B151SB	150		0.25	
	★BLM21B151SD	150		0.25	
	★BLM21B201S	200		0.35	
	★BLM21B221SB	220		0.35	
	★BLM21B221SD	220		0.25	
	★BLM21B331SB	330		0.40	
	★BLM21B331SD	330		0.30	
	★BLM21B421S	420		0.30	
	★BLM21B471SB	470		0.45	
	★BLM21B471SD	470		0.35	
	★BLM21B601S	600		0.35	
	★BLM21B751SD	750		0.40	
1206 	★BLM11B102S	1000	300	0.40	-55 ~ +125°C
	★BLM11B152SD	1500		0.45	
	★BLM11B182S	1800		0.50	
	★BLM11B222SD	2200		0.60	
	★BLM21B222S	2200		0.60	
	★BLM21B272S	2700		0.80	
1206 	★BLM31B601FI	600	300	0.35	-55 ~ +125°C

\*Available as standard through authorized Murata Electronics Distributors.

## COMPARISON BLM11A SERIES vs. BLM11B SERIES

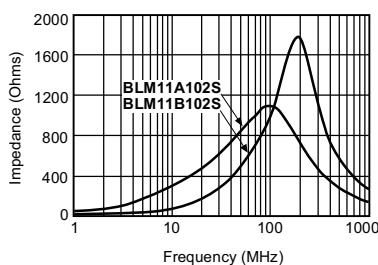


SURFACE MOUNT  
EMI FILTERS

# SURFACE MOUNT EMI FILTERS CHIP FERRITE BEADS

**muRata**  
Innovators in Electronics

BLM□□B Series

## TYPICAL IMPEDANCE CHARACTERISTICS

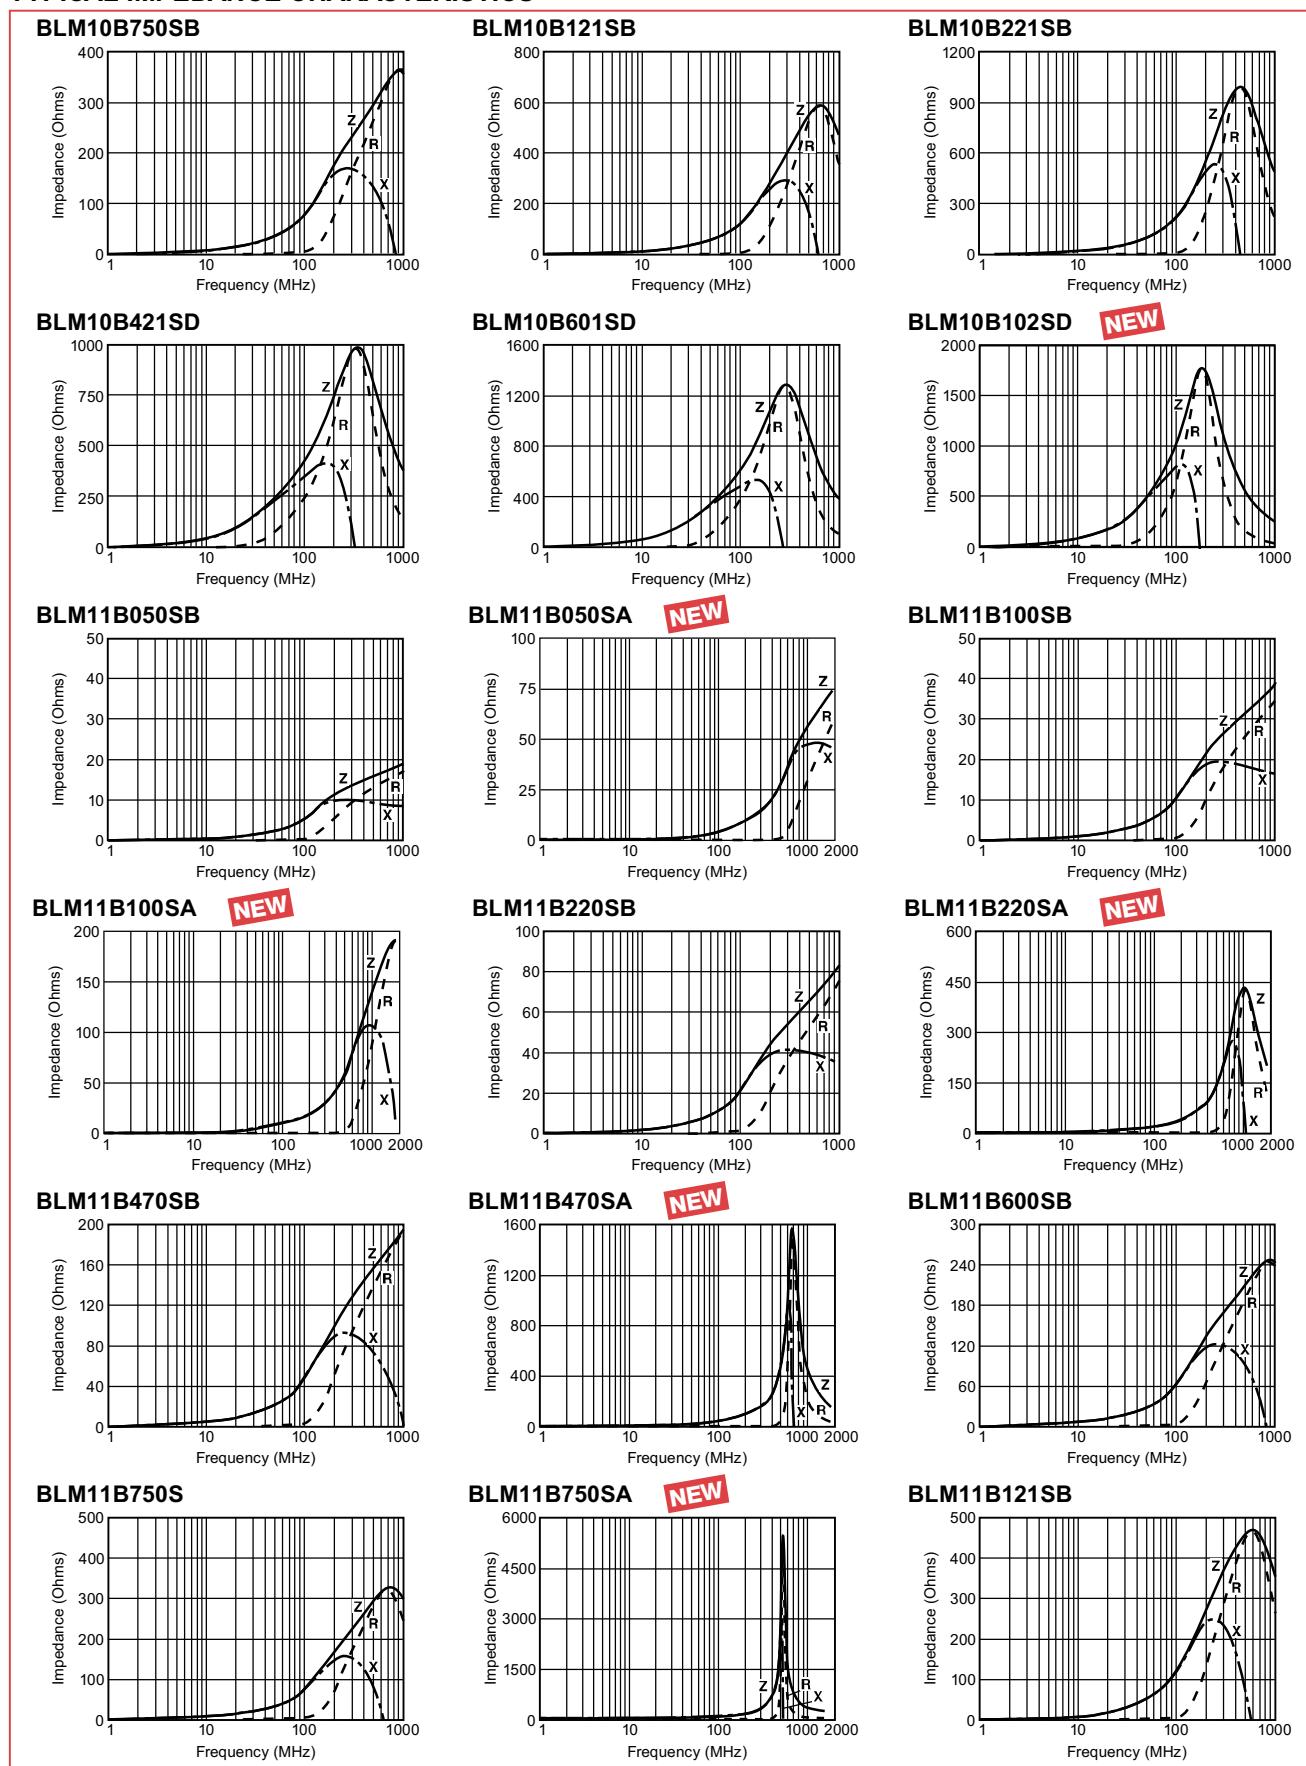


# SURFACE MOUNT EMI FILTERS CHIP FERRITE BEADS

**muRata**  
Innovator in Electronics

BLM□□B Series

## TYPICAL IMPEDANCE CHARACTERISTICS

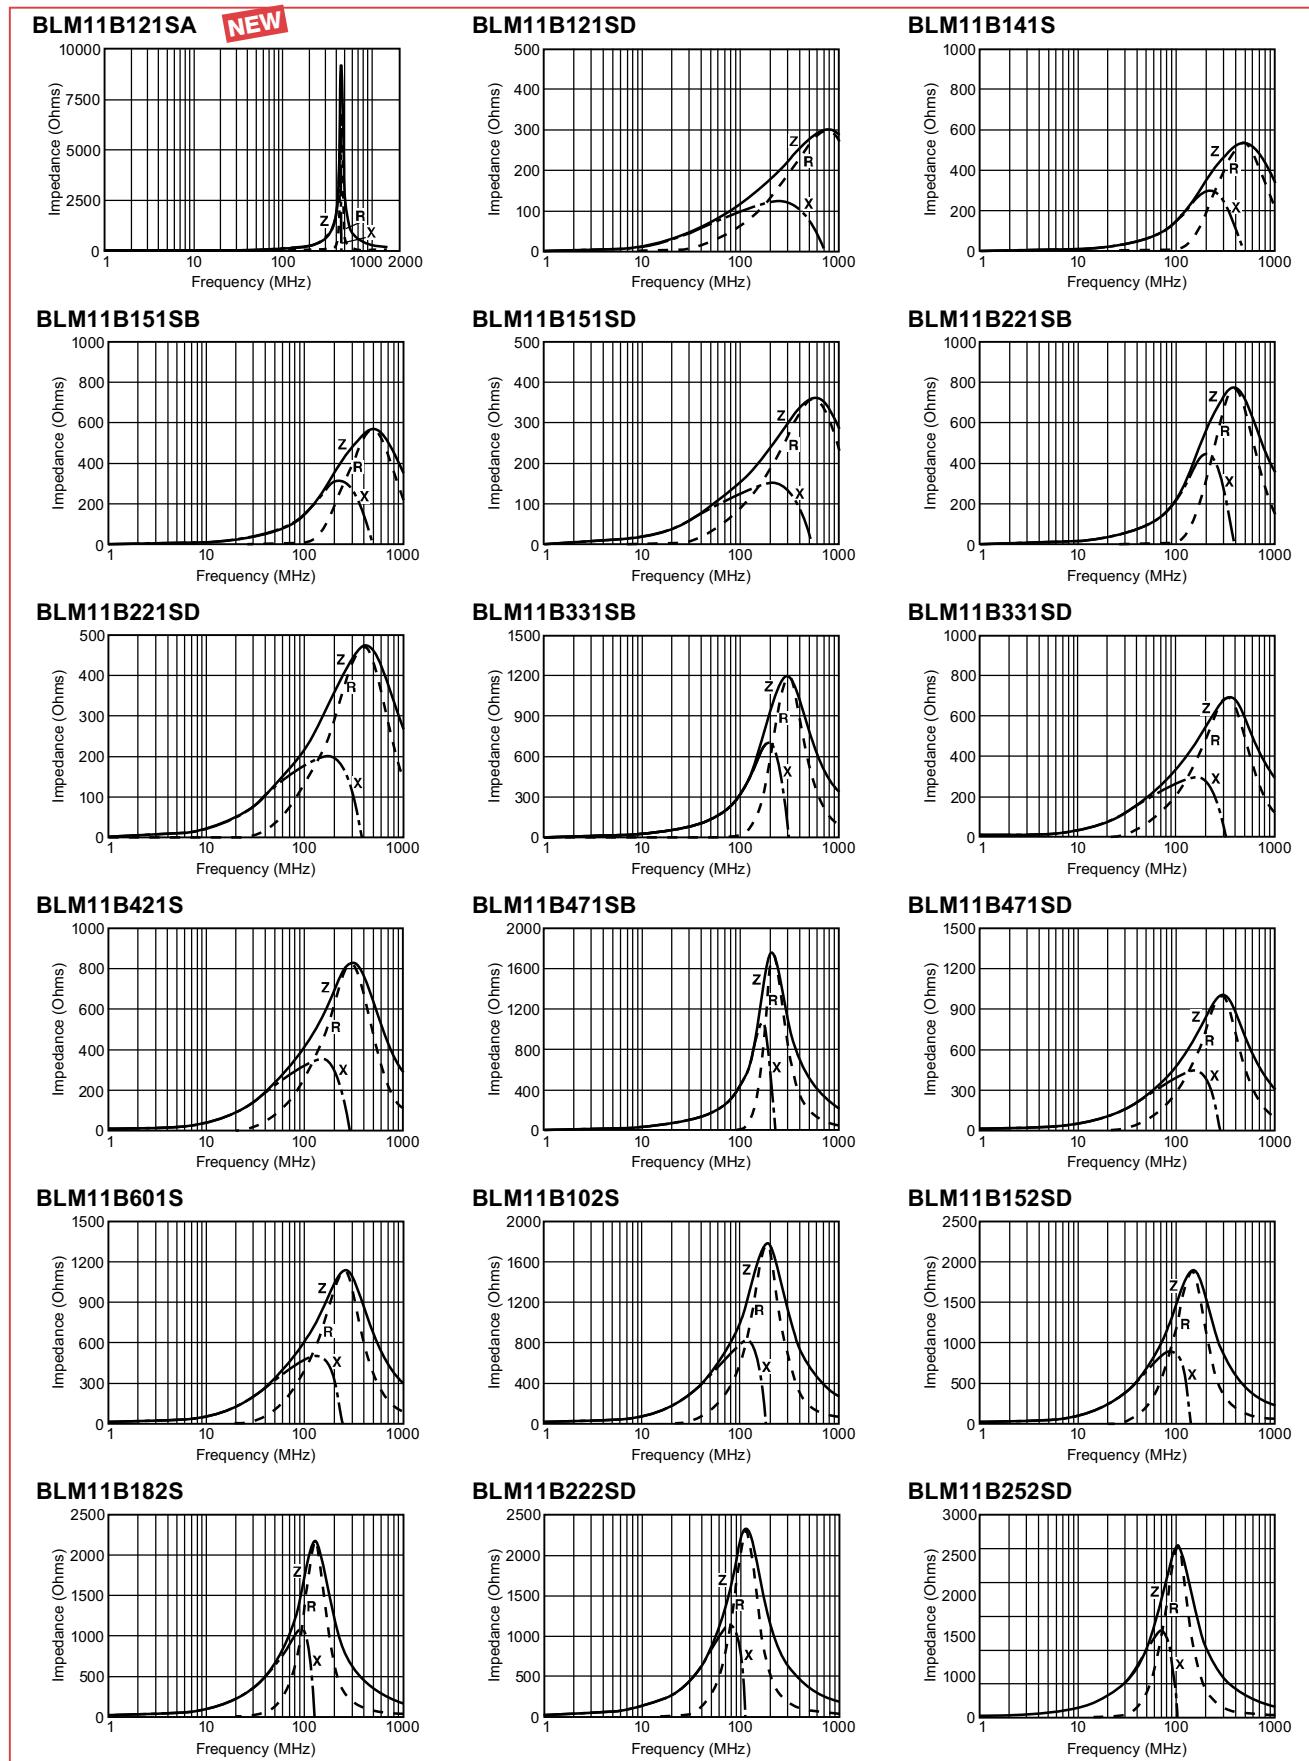

SURFACE MOUNT  
EMI FILTERS


# SURFACE MOUNT EMI FILTERS CHIP FERRITE BEADS

**muRata**  
Innovator in Electronics


BLM□□B Series

## TYPICAL IMPEDANCE CHARACTERISTICS


**BLM21B050S**

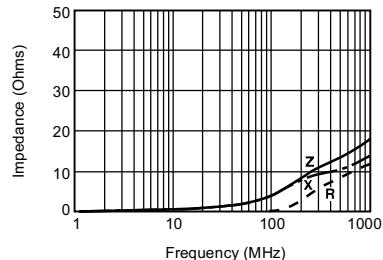


**BLM21B600SB**

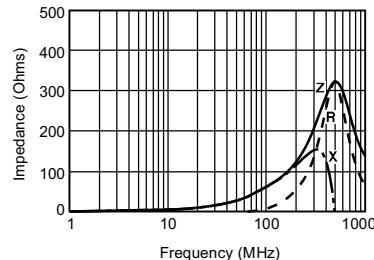


**BLM21B750S**

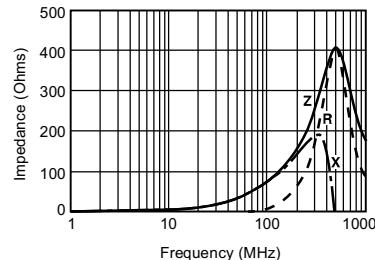


**BLM21B121SB**

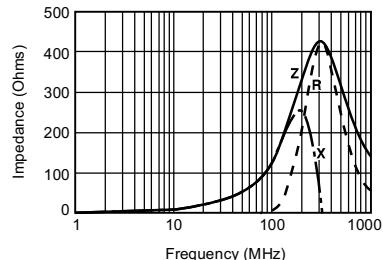


**BLM21B121SD**

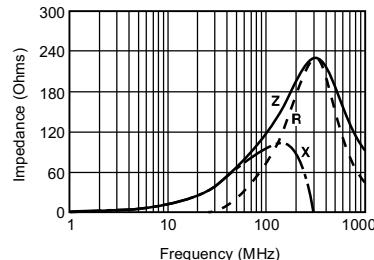


**BLM21B151SB**

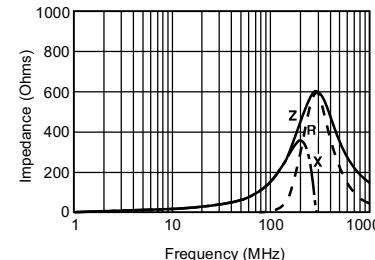


**BLM21B151SD**

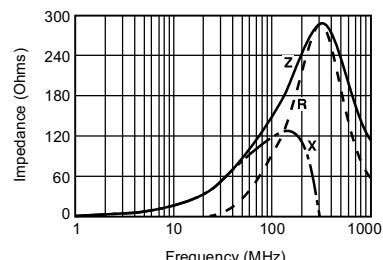


**BLM21B201S**

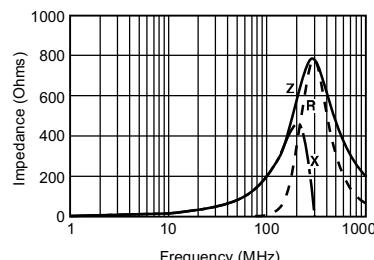


**BLM21B221SB**

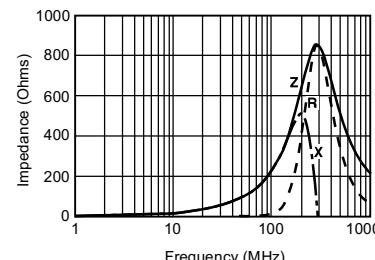


**BLM21B221SD**

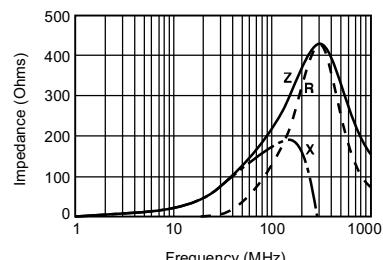

**BLM21B331SB**

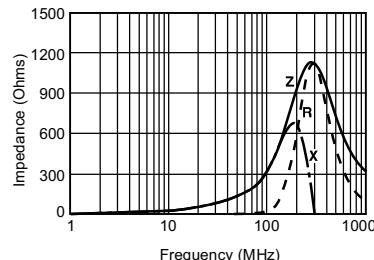

**BLM21B331SD**

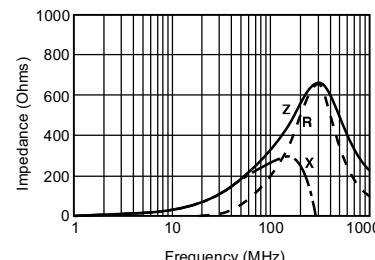


# SURFACE MOUNT EMI FILTERS CHIP FERRITE BEADS

**murata**  
Innovator in Electronics


BLM□□B Series

## TYPICAL IMPEDANCE CHARACTERISTICS


**BLM21B421S**

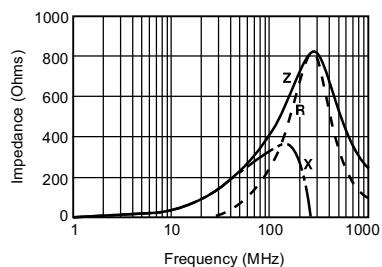


**BLM21B471SB**

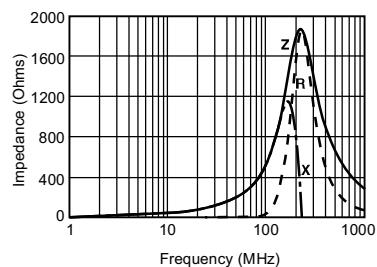


**BLM21B471SD**

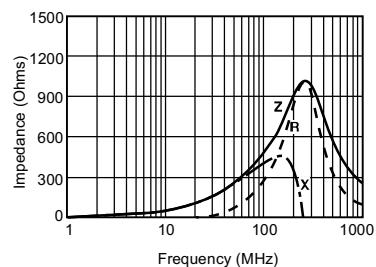


**BLM21B601S**

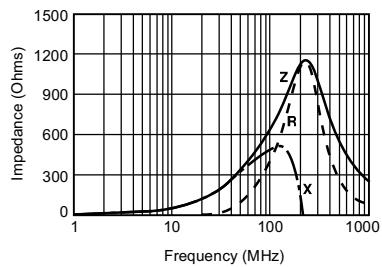


**BLM21B751S**

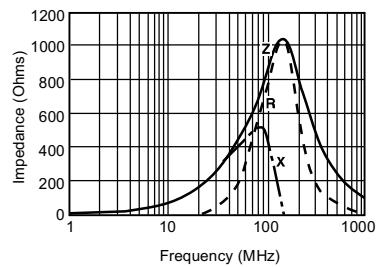


**BLM21B751SD**

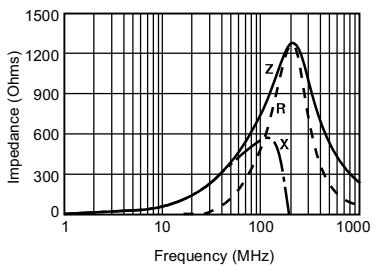


**BLM21B102S**

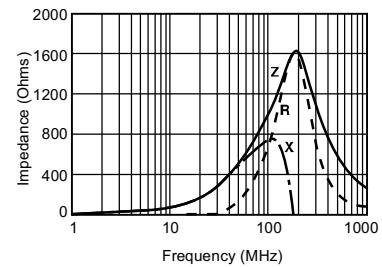


**BLM21B152SD**

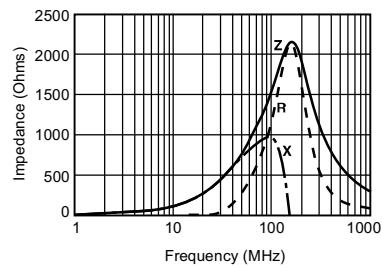


**BLM21B182SD**

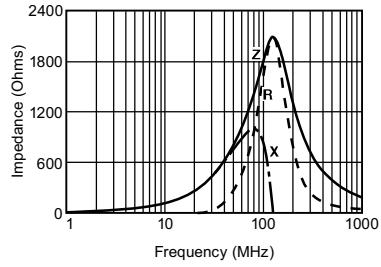


**BLM21B222SD**

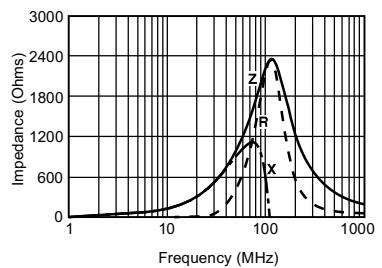


**BLM21B222S**

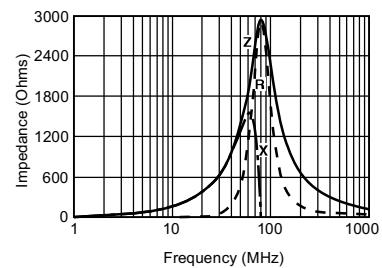

**BLM21B272S**

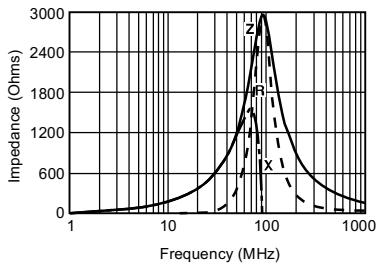

**BLM31B601FI**

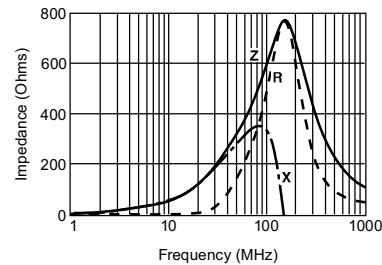

SURFACE MOUNT  
EMI FILTERS