



STRUCTURE AND DIMENSIONS

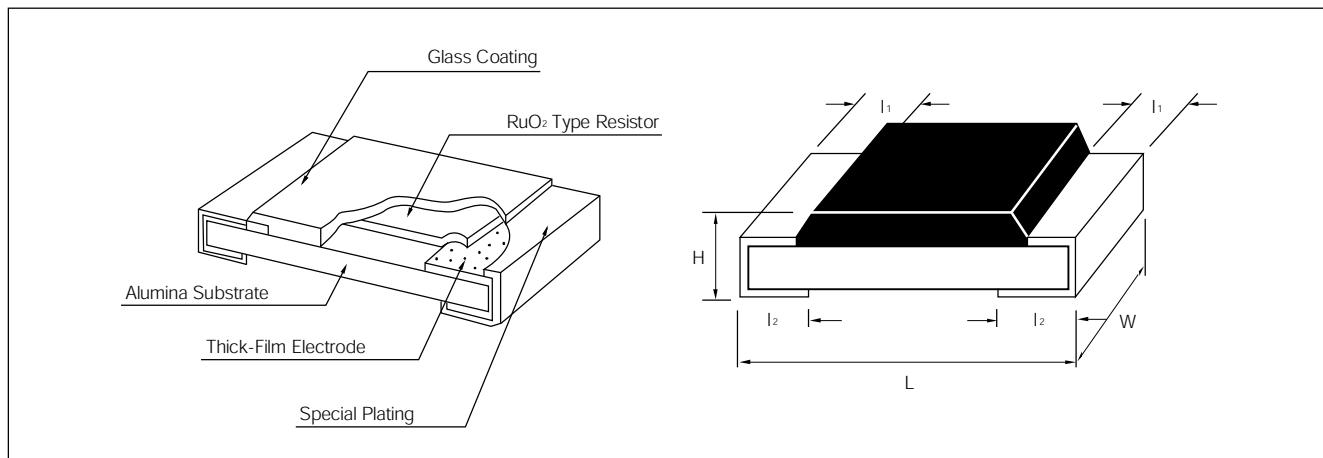



(UNIT : mm)

Type	L	W	H	h	l ₂
RC1005(1/16W)	1.00±0.05	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
RC1608(1/10W)	1.60±0.10	0.80±0.15	0.45±0.10	0.30±0.20	0.35±0.10
RC2012(1/8W)	2.00±0.20	1.25±0.15	0.50±0.10	0.40±0.20	0.35±0.20
RC3216(1/4W)	3.20±0.20	1.60±0.15	0.55±0.10	0.45±0.20	0.40±0.20
RC3225(1/4W)	3.20±0.20	2.55±0.20	0.55±0.10	0.45±0.20	0.40±0.20
RC5025(1/2W)	5.00±0.15	2.50±0.15	0.55±0.15	0.60±0.20	0.60±0.20
RC6432(1W)	6.30±0.15	3.20±0.15	0.55±0.15	0.60±0.20	0.60±0.20

PARTS NUMBERING SYSTEM

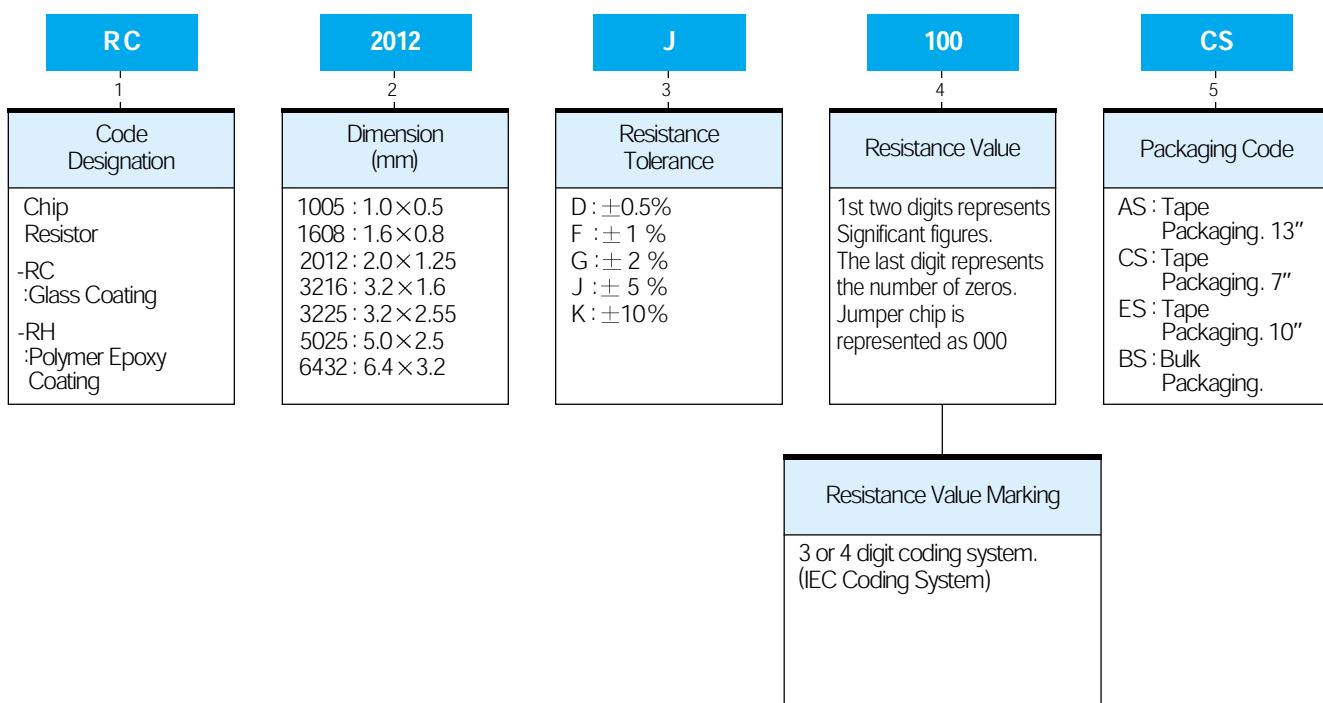

GENERAL SPECIFICATION

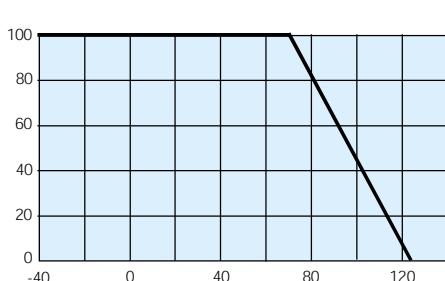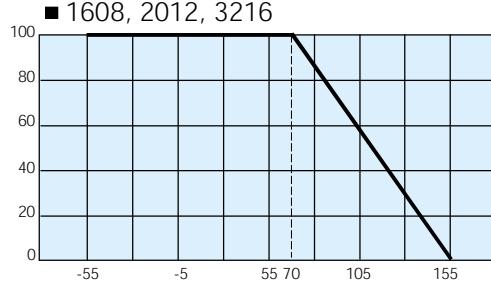Description	RC1005	RC1608	RC2012	RC3216	RC3225	RC5025	RC6432
Power Rating (W) at 70°C	0.063W	0.10W	0.125W	0.25W	0.25W	0.5W	1W
Power Derating Curve	  <p>The rated power is the maximum continuous loading power at 70°C ambient temperature. For ambient temperature's above 70°C the loading power follows the above power derating curve.</p>						
Rated Voltage	$\sqrt{\text{Rated power}(w) \times \text{Normal resistance value (W)}}$						
Working Voltage (Max)	50V	50V	50V	150V	200V	200V	200V
Overload Voltage (Max)	100V	100V	100V	300V	400V	400V	400V
Resistance Range	(UNIT: Ω)						
D($\pm 0.5\%$)	-	10~1M	10~1M	10~1M	10~1M	-	-
F($\pm 1\%$), G($\pm 2\%$)	10~1M	10~1M	10~1M	10~1M	10~1M	10~1M	10~1M
J($\pm 5\%$)	10~1M	1~10M	1~10M	1~10M	1~10M	1~10M	1~10M
K($\pm 10\%$)	10~1M	1~10M	1~10M	1~10M	1~10M	1~10M	1~10M
Jumper Chip	50 mΩ max						
Operating Temperature Range	-55°C ~ 125°C -55°C ~ 155°C (For 1608, 2012, 3216)						
Rated Temperature Range	70°C						
Temperature Coefficient	Resistance Tolerance	Resistance Range		Temperature Coefficient			
	J ($\pm 5\%$) K ($\pm 10\%$)	$1 \Omega \leq R \leq 10 M\Omega$		$\pm(300/200) \text{ PPM}/\text{°C}$			
		$10 \Omega \leq R < 1 M\Omega$		$\pm 100 \text{ PPM}/\text{°C}$			
		$1 M\Omega \leq R < 10 M\Omega$		$\pm 300 \text{ PPM}/\text{°C}$			
	G ($\pm 2\%$) F ($\pm 1\%$) D ($\pm 0.5\%$)		$10 \Omega \leq R < 1 M\Omega$		$\pm 100 \text{ PPM}/\text{°C}$		

* Please specify wattage when power rating at the mark(*) is required at the time of ordering.

SPECIFICATION IN THE LOW RESISTANCE RANGE

Description	RC2012	RC3216	RC3225	RC5025	RC6432														
Power Rating (W) at 70°C	0.10W	0.125W *0.25W	0.25W	0.5W	1W														
Power Derating Curve	<p>POWER Derating Curve</p> <table border="1"> <caption>Data points estimated from the Power Derating Curve graph</caption> <thead> <tr> <th>X (°C)</th> <th>Y (W)</th> </tr> </thead> <tbody> <tr><td>70</td><td>100</td></tr> <tr><td>80</td><td>80</td></tr> <tr><td>90</td><td>60</td></tr> <tr><td>100</td><td>40</td></tr> <tr><td>110</td><td>20</td></tr> <tr><td>120</td><td>0</td></tr> </tbody> </table>					X (°C)	Y (W)	70	100	80	80	90	60	100	40	110	20	120	0
X (°C)	Y (W)																		
70	100																		
80	80																		
90	60																		
100	40																		
110	20																		
120	0																		
	<p>The rated power is the maximum continuous loading power at 70°C ambient temperature. For ambient temperature's above 70°C the loading power follows the above power derating curve.</p>																		
Rated Voltage	$\sqrt{\text{Rated power}(w) \times \text{Normal resistance value (W)}}$																		
Working Voltage (Max)	50V	100V	200V	200V	200V														
Overload Voltage (Max)	100V	200V	400V	400V	400V														
Resistance range	(UNIT : Ω)																		
F($\pm 1\%$)																			
G($\pm 2\%$)	0.2 Ω ~ 0.91 Ω (E24 Series)																		
J($\pm 5\%$)																			
K($\pm 10\%$)																			
Operating temperature range	-55 °C ~ 125 °C																		
Rated Ambient Temperature	70°C																		
Temperature Coefficient	Resistance Tolerance	Resistance Range	Temperature Coefficient																
	F($\pm 1\%$)	0.2 Ω ≤ R ≤ 1 Ω	±200 PPM/°C																
	G($\pm 2\%$)	0.2 Ω ≤ R ≤ 1 Ω	±200PPM/°C																
	J($\pm 5\%$)	0.2 Ω ≤ R ≤ 1 Ω	±(600/300)PPM/°C																
	K($\pm 10\%$)	0.2 Ω ≤ R ≤ 1 Ω	±(600/300)PPM/°C																

* Please specify wattage when power rating at the mark(*) is required at the time of ordering.


TRIMMABLE CHIP RESISTOR



FEATURES

- Available in use of function trimming.
- Compatible with both wave and reflow soldering.
- Highly stable in auto-placement surface mounting application.
- Excellent electrical characteristic.

DIMENSIONS

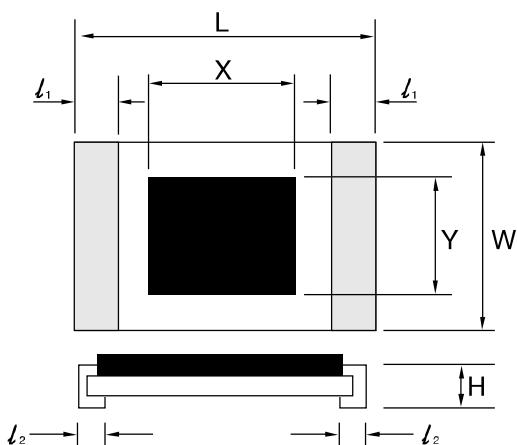

X, Y : Trimming area

(Unit : mm)

TYPE	L	W	H	l_1	l_2	X	Y
RT1608	1.60 ± 0.10	0.80 ± 0.15	0.45 ± 0.10	0.30 ± 0.20	0.35 ± 0.10	0.50 ± 0.10	0.40 ± 0.10
RT2012	2.00 ± 0.20	1.25 ± 0.15	0.50 ± 0.10	0.40 ± 0.20	0.35 ± 0.20	0.70 ± 0.10	0.60 ± 0.10
RT3216	3.20 ± 0.20	1.60 ± 0.15	0.55 ± 0.10	0.45 ± 0.20	0.40 ± 0.20	1.30 ± 0.10	1.00 ± 0.10

GENERAL SPECIFICATION

RT	2012	M	100	CS
Code Designation	Dimension (mm)	Resistance Tolerance	Resistance Value	Packaging Code
Trimmable Chip Resistor	1608:1.6×0.8 2012:2.0×1.25 3216:3.2×1.6	K=±10%	E12 Series E6 Series (IEC Coding system)	CS : Tape Packaging GS : Bulk Packaging

* RT:DIP Type(Major)

RATING

Type	Power Rating	Working Voltage (MAX)	Over load Voltage (MAX)	Resistance Range	Operating Temperature Range	Rating Ambient Temperature	Temperature Coefficient
RT1608	1/16 W	50 V	100 V	1~10 MΩ			
RT2012	1/10W	100 V	200 V	1~10 MΩ			
RT3216	1/8W	200 V	400 V	1~10 MΩ	-55 °C ~+125 °C	+70°C	±200ppm/ °C ±300ppm/ °C
	1/4W	200 V	400 V	1~10 MΩ			


PACKAGING

- The Chip Network Resistors can be supplied with packaged carrier tape for effective use in SMD machine.
- All Reel taping specifications are in accordance with EIAJ RC-1009.
- Standard Quantity :

7 inch reel	5,000/1 reel
13 inch reel	20,000/1 reel

- Chip Resistor for Bulk shall be in the polyethylene bag and Quantity of the Chip Resistors in bag is determined by customer orders.(Standard Quantity : 5,000EA)


R/R TYPE CHIP NET WORK RESISTOR

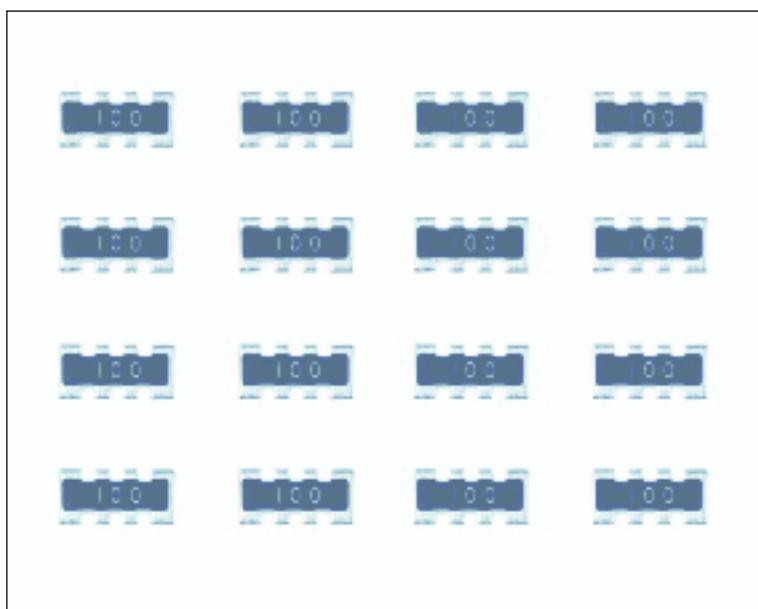

FEATURES

- High density mounting
- Improvement of placement efficiency.
- Automatic placement.


DIMENSIONS

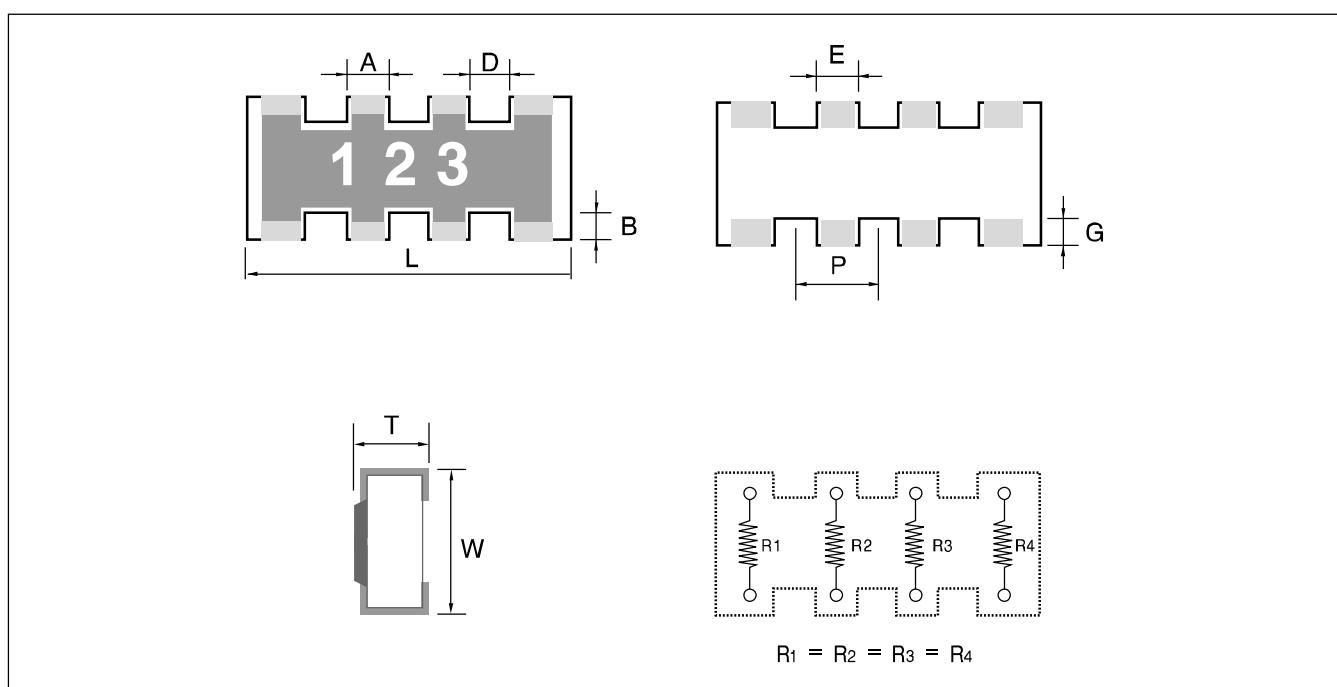

UNIT [mm]

TYPE	L	W	T	A	D	B	P	E	G
RR164P	3.2 ± 0.2	1.5 ± 0.2	0.5 ± 0.2	0.5 ± 0.2	Max 0.16	0.25 ± 0.2	0.8 ± 0.15	0.5 ± 0.2	0.25 ± 0.2


R/R TYPE CHIP NET WORK RESISTOR

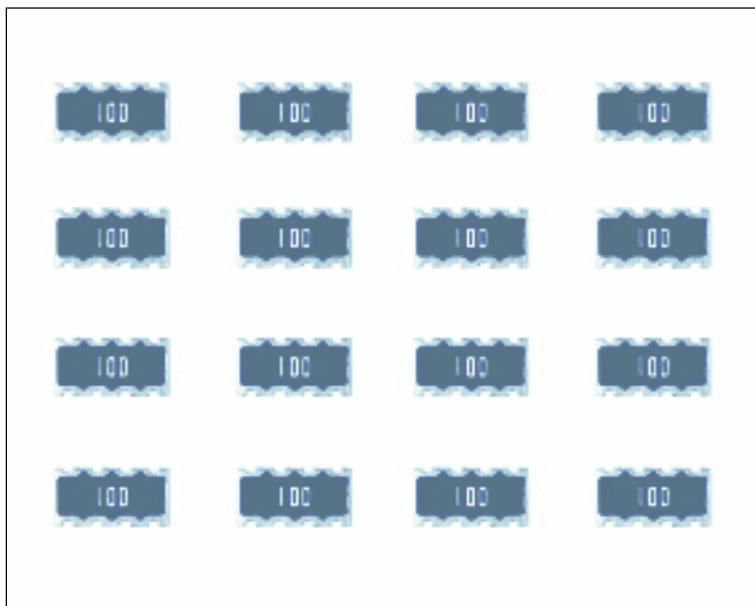

FEATURES

- High density mounting
- Improvement of placement efficiency.
- Automatic placement.

DIMENSIONS

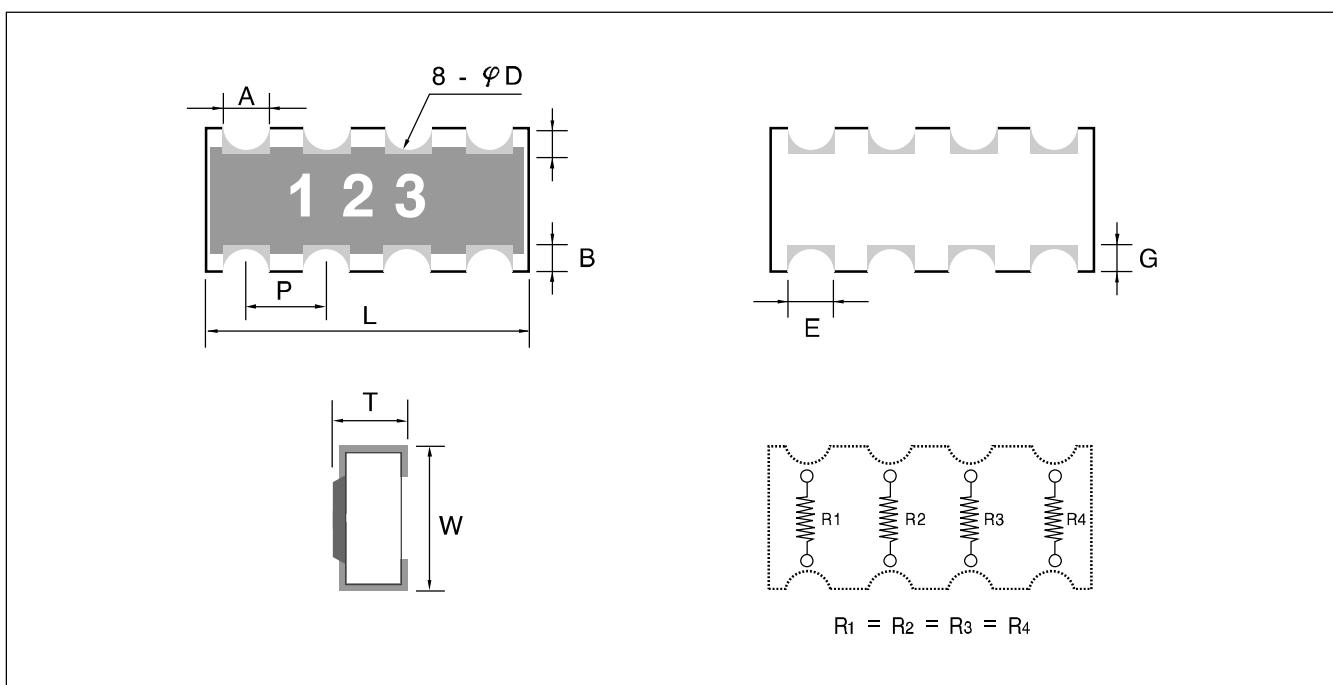

UNIT [mm]

TYPE	L	W	T	A	D	B	P	E	G
RN164P	3.2 ± 0.2	1.6 ± 0.2	0.6 ± 0.1	0.45 ± 0.1	0.3 ± 0.1	0.3 ± 0.2	0.8 ± 0.1	0.45 ± 0.1	0.40 ± 0.15

THICK FILM CHIP RESISTORS

PARTS NUMBERING SYSTEM

RP/RN	16/10	4P	J	103	CS
Code Designation	Dimension (mm)	Number of Resistors	Resistance Tolerance	Resistance Value	Packaging Code
Chip Network Resistor	16:1608 Type 10:1005 Type	4p : 4 Resistors	G : $\pm 2\%$ J : $\pm 5\%$ K : $\pm 10\%$	E24 Series (IEC Coding system)	CS/AS/ES : Tape Packaging GS : Bulk Packaging

* RP, RR: Dip Type(Convex Type)

* RN: Through Hole Type(Concave Type)

RATING

Type	Power Rating	Working Voltage (MAX)	Overload Voltage (MAX)	Resistance Range	Operating Temperature Range	Rating Ambient Temperature	Temperature Coefficient
RP104P	1/16W	50V	100V	10~1M	-55~125°C	+70°C	$\pm 250 \text{ PPM}/^\circ\text{C}$
RP164P	1/16W	50V	100V	10~1M	-55~125°C	+70°C	$\pm 250 \text{ PPM}/^\circ\text{C}$
RN164P	1/16W	50V	100V	10~1M	-55~125°C	+70°C	$\pm 250 \text{ PPM}/^\circ\text{C}$

PACKAGING

- The Chip Network Resistors can be supplied packaged carrier tape for effective use SMD machine.
- All Reel taping specifications are in accordance with EIAJ RC-1009.
- Standard Quantity :

7 inch reel	5,000EA/1reel
10 inch reel	10,000EA/1reel
13 inch reel	20,000EA/1reel(15,000EA/1reel)



- Chip Network Resistor for Bulk shall be in the plastic case and Quantity of the Chip Resistors in bag is determined by customer orders.(Standard Quantity : 5,000EA)

CHARACTERISTICS PERFORMANCE

ELECTRICAL CHARACTERISTICS

Item	Specification	Test Method														
Direct Current Resistance	Within the regulated resistance tolerance. Jumper chip $\leq 50\text{ M}\Omega$	Applying time:within 5 sec <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th>Resistance range(Ω)</th> <th>Max test voltage(V)</th> </tr> <tr> <td>$R < 100$</td> <td>0.3</td> </tr> <tr> <td>$100 \leq R < 1K$</td> <td>1.0</td> </tr> <tr> <td>$1K \leq R < 10K$</td> <td>3</td> </tr> <tr> <td>$10K \leq R < 100K$</td> <td>10</td> </tr> <tr> <td>$100K \leq R < 1M$</td> <td>25</td> </tr> <tr> <td>$1M \leq R$</td> <td>50</td> </tr> </table>	Resistance range(Ω)	Max test voltage(V)	$R < 100$	0.3	$100 \leq R < 1K$	1.0	$1K \leq R < 10K$	3	$10K \leq R < 100K$	10	$100K \leq R < 1M$	25	$1M \leq R$	50
Resistance range(Ω)	Max test voltage(V)															
$R < 100$	0.3															
$100 \leq R < 1K$	1.0															
$1K \leq R < 10K$	3															
$10K \leq R < 100K$	10															
$100K \leq R < 1M$	25															
$1M \leq R$	50															
T.C.R(Resistance Temperature Characteristic)	$1 \leq R < 10: +300\text{ppm}/^{\circ}\text{C}$ $-200\text{ppm}/^{\circ}\text{C}$ $10 \leq R < 1M: \pm 100\text{ppm}/^{\circ}\text{C}$ $1M \leq R \leq 10M: \pm 300\text{ppm}/^{\circ}\text{C}$	Test temperature($^{\circ}\text{C}$) (20) \rightarrow (-55) \rightarrow (20) \rightarrow (125) \rightarrow (20) T.C.R($\text{ppm}/^{\circ}\text{C}$) = $(R - R_0)/R_0 \times 1/(T - T_0) \times 10^6$ T = 20($^{\circ}\text{C}$) T = Test temperature($^{\circ}\text{C}$) R ₀ = Resistance at room temperature(Ω) R = Resistance at T(Ω)														
Short-time Overload	$\Delta R : \leq \pm(1\% + 0.1\Omega)$ of the initial value Visual : No evidence of mechanical damage Jumper chip : $\leq 50\text{ M}\Omega$	Apply 2.5 times rated voltage for 5sec. Wait 30 minutes at room temperature and measure the resistance value.														
Intermittent Overload	$\Delta R : \leq \pm(3\% + 0.1\Omega)$ of the initial value Visual : No evidence of mechanical damage Jumper chip : $\leq 50\text{ M}\Omega$	Perform 10,000 cycles at 2.5 times RCW or the Max. over load voltage ON(2.5 times rated voltage) : 1 sec OFF : 25 sec Have stabilization time of 30 minutes without loading and measure resistance.														
Dielectric withstand-ing Voltage	No evidence of mechanical damage.	Apply AC 500V for 1 minute. 1005(1/16W), 1608(1/16W): Apply AC 100V for 1 minute														
Insulation Resistance	Over the 1000 $\text{M}\Omega$	Apply DC 500V for 1 minute. 1005(1/16W), 1608(1/16W): Apply DC 100V for 1 minute														

MECHANICAL CHARACTERISTICS

Item	Specification	Test Method												
Solderability	Coverage : $\geq 95\%$ each termination. Visual : No crack of termination parts and ceramic exposure of surface by melting	After immersing in flux, dip into the $235 \pm 5^{\circ}\text{C}$ molten solder for 2 ± 0.5 sec Solder : S63A(KSD 6704) Flux : ROSIN(KSM 2951) Flux is the composition of ROSIN and the methanol Weight rate of ROSIN is about 25%												
Bending Test	$\Delta R : \leq \pm(0.5\% + 0.05\Omega)$ of the initial value Visual : No evidence of mechanical damage.	After soldering resistor on the PCB, 3mm of bending shall be applied for 10 sec. Material of PCB : Glass Epoxy Thickness : 1.6mm Measure resistance during load application 												
Terminal Strenght	Load pull : $\geq 0.5\text{kg}$ 1005(1/16W), 1608(1/16W) $\geq 0.3\text{kg}$	pull Direction fixed 0.4 lead 												
Terminal Strenght	$\Delta R : \leq \pm(1\% + 0.05\Omega)$ of the initial value Visual : No evidence of mechanical damage.	Immerse in molten solder at $260 \pm 5^{\circ}\text{C}$ for 10 ± 1 sec. Preheat and soldering Procedure <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th>Temperature($^{\circ}\text{C}$)</th> <th>Time(sec)</th> </tr> <tr> <td>80 - 100</td> <td>120</td> </tr> <tr> <td>150 - 180</td> <td>120</td> </tr> <tr> <td>260 + 5</td> <td>10</td> </tr> <tr> <td>150 - 180</td> <td>60</td> </tr> <tr> <td>80 - 100</td> <td>60</td> </tr> </table> Solder : S63A(SSD 6704) Flux : The composition of ROSIN (KSM295)25% and methanol (KSM 1658)75%	Temperature($^{\circ}\text{C}$)	Time(sec)	80 - 100	120	150 - 180	120	260 + 5	10	150 - 180	60	80 - 100	60
Temperature($^{\circ}\text{C}$)	Time(sec)													
80 - 100	120													
150 - 180	120													
260 + 5	10													
150 - 180	60													
80 - 100	60													
Anti-Vibration Test	$\Delta R : \leq \pm(1\% + 0.05\Omega)$ of the initial value Visual : No evidence of mechanical damage.	2 hours each in X, Y, and Z axis(total 6 hours) 10 to 55 Hz sweep in 1 minute amplitude.												

ELECTRICAL CHARACTERISTICS

Item	Specification	Test Method															
Low Temperature exposure	$\Delta R : \leq \pm(3\% + 0.1 \Omega)$ of the initial value. Visual : No evidence of mechanical damage.	Dwell in $-55 \pm 3^\circ\text{C}$ chamber without loading for 1000 ± 12 hours Dwell for 60 minutes at Room temperature and Measure resistance value.															
Temperature Cycle	$\Delta R : \leq \pm(1\% + 0.1 \Omega)$ of the initial value. Visual : No evidence of mechanical damage.	Perform 100Cycles as follows. <table border="1"> <thead> <tr> <th>No.</th><th>Temperature($^\circ\text{C}$)</th><th>Time(min)</th></tr> </thead> <tbody> <tr> <td>1</td><td>-55 ± 3</td><td>30</td></tr> <tr> <td>2</td><td>20 ± 3</td><td>15</td></tr> <tr> <td>3</td><td>125 ± 3</td><td>30</td></tr> <tr> <td>4</td><td>20 ± 3</td><td>15</td></tr> </tbody> </table>	No.	Temperature($^\circ\text{C}$)	Time(min)	1	-55 ± 3	30	2	20 ± 3	15	3	125 ± 3	30	4	20 ± 3	15
No.	Temperature($^\circ\text{C}$)	Time(min)															
1	-55 ± 3	30															
2	20 ± 3	15															
3	125 ± 3	30															
4	20 ± 3	15															
Load Life in Moisture	At $R < 10 \Omega$ $\Delta R : \leq \pm 5\%$ At $R < 1 \text{ M}\Omega$ $\Delta R : \leq \pm(3\% + 0.1 \Omega)$ At $R \geq 1 \text{ M}\Omega$ $\Delta R : \leq \pm 5\%$ Visual : No evidence of mechanical damage.	Temperature : $40 \pm 2^\circ\text{C}$ RH : 90~95% Applying rated voltage for 90 minutes "ON" and 30minutes"OFF" Duration : 1000 hours Dwell in Room temperature for 1 hour and measure resistance value.															
Load Life in high Temperature	At $R < 10 \Omega$ $\Delta R : \leq \pm 5\%$ At $R < 1 \text{ M}\Omega$ $\Delta R : \leq \pm(3\% + 0.1 \Omega)$ At $R > 1 \text{ M}\Omega$ $\Delta R : \leq \pm 5\%$	Temperature : $70 \pm 3^\circ\text{C}$ at rated voltage. Applying rated voltage for 90 minutes "ON" and 30minutes"OFF" Duration : 1000 hours Dwell in Room temperature for 1 hour and measure resistance value.															
Heat Resistance (High Temperature Exposure)	$\Delta R : \leq \pm(3\% + 0.1 \Omega)$ of the initial value. Visual : No evidence of mechanical damage.	Dwell in $125 \pm 3^\circ\text{C}$ chamber without loading for 1000 ± 12 hours Dwell in Room temperature for 1 hour and measure resistance value.															

PACKAGING

- The Chip Resistor can be supplied with packaged carrier tape for effective use in SMD machine.
- All Reel taping specifications are in accordance with EIAJ RC-1009.
- Standard Quantity :


REEL SIZE	1005	1608, 2012, 3216	5025, 6432
7 inch reel	10,000EA/1 reel	5,000EA/1 reel	4,000EA/1 reel
10 inch reel	-	10,000EA/1 reel	-
13 inch reel	40,000EA/1 reel	20,000EA/1 reel	15,000EA/1 reel

- Chip Resistor for Bulk shall be in the plastic Quantity of the
Chip Resistors in bag is determined by custom orders.(Standard Quantity : 5,000EA)


CARRIER TAPE DIMENSIONS

► This is applied to 1005 series.

(Unit: mm)

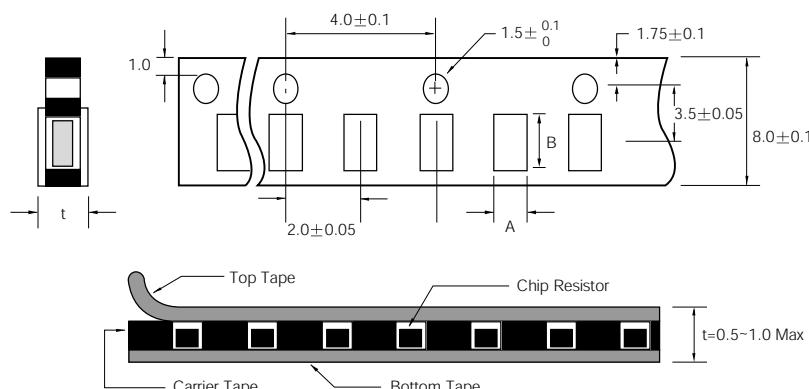

► This is applied to 5025, 6432 series.

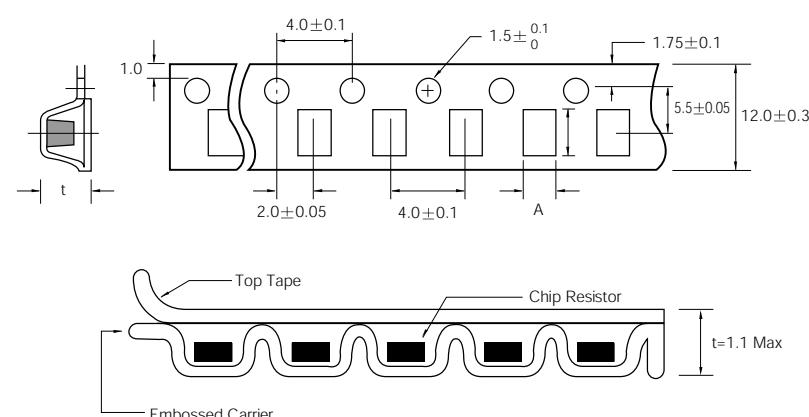

• WINDOW DIMENSIONS


(mm)

ITEM SIGN.	RC 1005 (1/16W)	RC 5025 (1/2W)	RC 6432 (1W)
A	0.7±0.10	2.80	3.50±0.10
B	1.20±0.10	5.32±0.20	6.75±0.10
t	0.5(MAX)	1.10(MAX)	1.10(MAX)

THICK FILM CHIP RESISTORS

► This is applied to 1608, 2012, 3216, 3225 series

(Unit: mm)

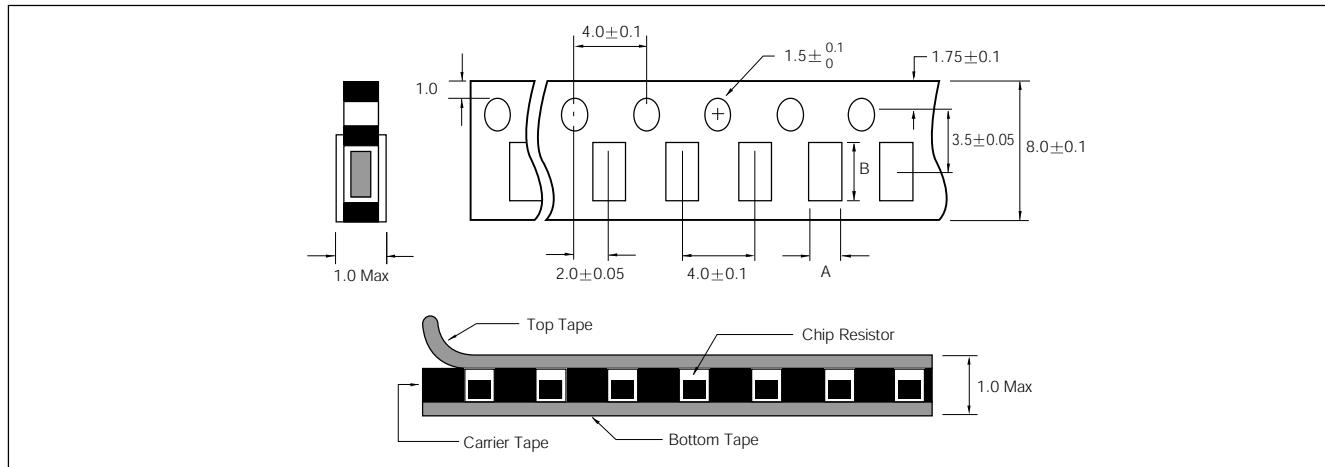


• WINDOW DIMENSIONS

(mm)


ITEM SIGN.	RC 1608 (1/16W)	RC 2012 (1/10W)	RC 3216 (1/8, 1/4W)	RC 3225 (1/4W)
A	1.10 ± 0.20	1.65 ± 0.20	2.00 ± 0.20	2.90 ± 0.20
B	1.90 ± 0.20	2.40 ± 0.20	3.60 ± 0.20	3.60 ± 0.20
t	0.90(MAX)	1(MAX)	1(MAX)	1(MAX)

TAPING METHOD

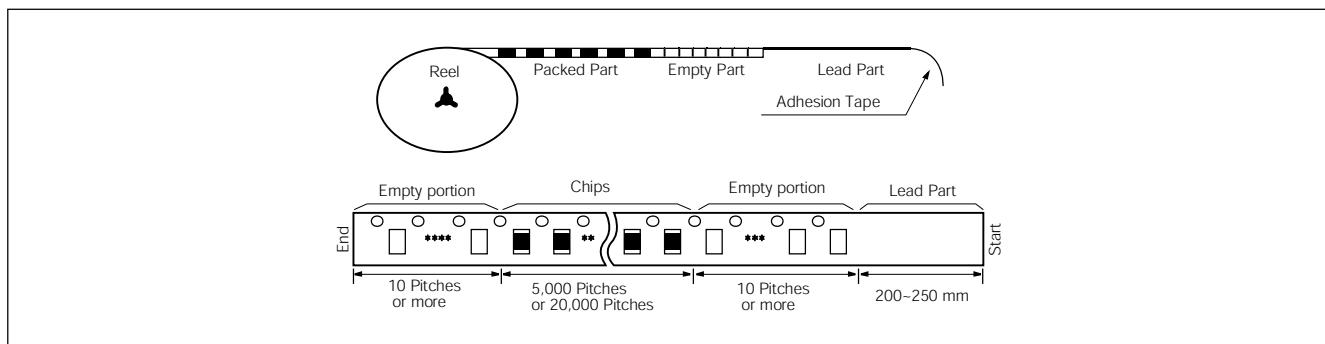

REEL DEMENSIONS

(Ø178mm : 7 inch)

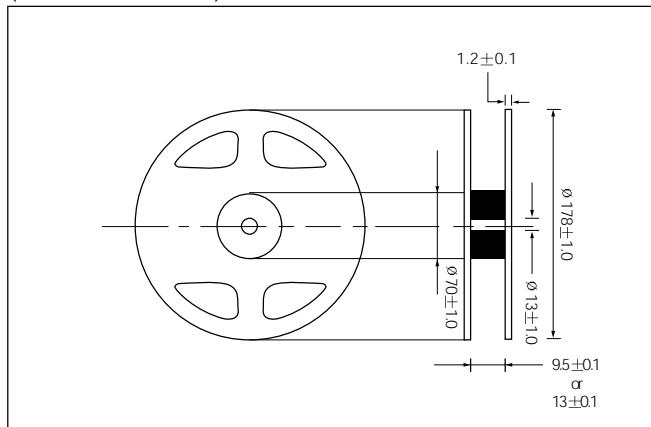

(Ø330mm : 13 inch)

